



M

CURATITORE CU APA RECE SI POMPA AXIALA




M - CURATITORE CU APA RECE SI POMPA AXIALA


- Structura vertical ergonomica si manevrabila
- Pompa axiala cu pistoane din otel inoxidabil si cap din aluminiu pentru modelele M130-M140 si din alama pentru mod. M160
- Sistem de oprire totala la eliberarea manerului
- Protectie termica motor
- Sistem conectare rapida la alimentare
- Roti din cauciuc
- Tambur furtun inalta presiune
- Vertical design, ergonomic and handy
- Axial piston pump with stainless steel and aluminum head for mod. M130 - M140 and brass head for mod. M160
- Direct total stop: automatically activates and deactivates the cleaner everytime the trigger is pulled or released
- Motor thermal protection
- quick coupling for low pressure water connection
- Rubber wheels
- Hose reel

ACCESORII IN DOTARE

	N°	MOD.	COD.	DESCRIERE
	1	M130 M140-M160	01AC413 01AC414	Furtun presiune inalta l=6 m Furtun presiune inalta l=8 m
	2	Toate mod.	01AC405	Semilance cu pistol
	3	M140-M160	01AC412	Lance detergent
	4	M130 M140 M160	01AC407 01AC408 01AC409	Duza \varnothing 1,00 Duza \varnothing 1,05 Duza \varnothing 1,15
	5	Toate mod.	01AC406	Lance
	6	M140-M160	01AC415	Perie
	7	M140 M160	01AC410 01AC411	Duza rotativa \varnothing 1,00 Duza rotativa \varnothing 1,05

ACCESORII LA CERERE

KIT CURATARE TEVI	KIT SABLARE	KIT CURATARE PAVAJE
		
Mod. Toate mod. Furtun (15 m) Cod. 01AC365	Mod. M160 Lance sablare Cod. 01AC416	Mod. Toate mod. Curatare pavaje Cod. 01AC417
Mod. 160/15 Duza (035) Cod. 01AC336	Mod. Toate mod. Nisip (25 kg) Cod. 01AC284	

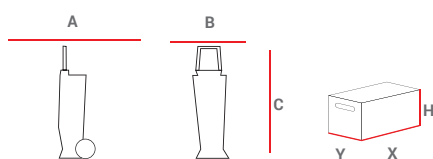

MOD	GREUTATI SI DIMENSIUNI UTILAJ				AMBALAJ			
	A	B	C	Net	X	Y	H	Brut
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
M	320	280	850	12	300	400	620	14

		M130	M140	M160
cod		01PF45	01PF46	01PF47
presiune max.	bar MPa - psi	130 13 - 1.880	140 14 - 2.000	150 16 - 2.300
debit max.	l/ora	360	410	480
pompa		AXIAL	AXIAL	AXIAL
sistem de oprire		TS	TS	TS
turatie pompa	rpm	2.800	2.800	2.800
putere amorsbita max.		1,7	2,0	2,3
alimentare electrica	f-V/Hz	1-230/50	1-230/50	1-230/50
temperatura alimentare max.	°c	40	40	40
cantitate pe palet	buc.	24	24	24